

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 June 2008 (12.06.2008)

PCT

(10) International Publication Number
WO 2008/070430 A1

(51) International Patent Classification:
G01R 33/44 (2006.01) *G01V 3/00* (2006.01)

(74) Agent: **OPPEDAHL, Carl**; Oppedahl Patent Law Firm LLC, P.O.Box 4850, Frisco, CO 80443-4850 (US).

(21) International Application Number:
PCT/US2007/085040

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
18 November 2007 (18.11.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/869,284 8 December 2006 (08.12.2006) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (for all designated States except US): **DOTY SCIENTIFIC, INC.** [US/US]; 700 Clemson Road, Columbia, SC 29229 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DOTY, F., David** [US/US]; Doty Scientific, Inc., 700 Clemson Road, Columbia, SC 29229 (US). **SHEVGOOR, Siddarth** [IN/US]; Doty Scientific, Inc., 700 Clemson Road, Columbia, SC 29229 (US).

Published:
— with international search report

(54) Title: IMPROVED NMR CRYOMAS PROBE FOR HIGH-FIELD WIDE-BORE MAGNETS

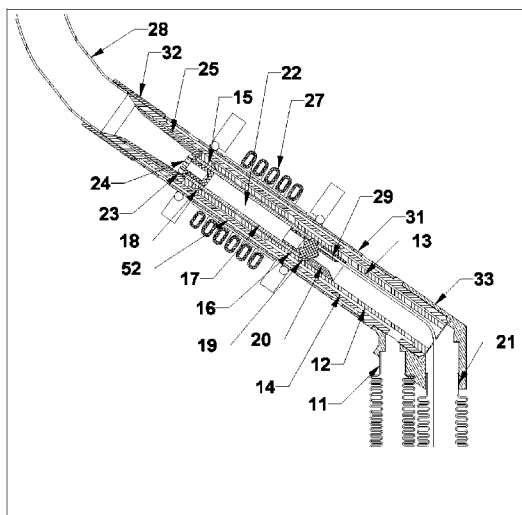

(57) Abstract: All critical circuit components, including the sample coils, are located along with the spinner assembly in a region that may be evacuated to high vacuum for thermal insulation and high-voltage operation. A hermetically sealed spinner assembly simultaneously satisfies the requirements of hermeticity, low total emissivity, rf compatibility, spinning performance, magnetic compatibility, and high filling factor by utilizing metal construction except for the central region near the rf sample coils. Hence, it is possible to maintain high vacuum in the region external to the MAS spinner assembly even over a broad range of bearing and drive gas temperatures. A bundle of optical fibers is provided for tachometry for spin rates up to 60 kHz. The use of alumina disc capacitors allows the noise contributions from the most critical capacitors to be reduced to a minor fraction of the total and simplifies high voltage operation.

WO 2008/070430 A1

Improved NMR CryoMAS Probe for High-field Wide-bore Magnets

Cross-reference to related applications

This patent application claims priority from US patent application number 60/869,284 filed December 8, 2006, which application is hereby incorporated herein by reference for all
5 purposes.

Field of the Invention

The field of this invention is a probe for Nuclear Magnetic Resonance (NMR) Magic Angle
10 Spinning (MAS) with cryogenically cooled sample coils and other critical circuit components while the sample is near room temperature.

Background of the Invention

15 Because of the richness of the information available from NMR, it has often been argued that NMR is the most powerful analytical technique for molecular structure determination. However, NMR has been more successful with liquids or materials dissolved in solvents than with rigid solids. The basic problem in NMR of solids is that rapid molecular tumbling and diffusion are not naturally present to average out chemical shift anisotropy and dipolar
20 couplings of abundant spin nuclides. Hence, the lines are normally broad and unresolved (often hundreds of ppm in width). A large number of techniques have been developed to improve the resolution in NMR of solids, but most modern techniques include extremely rapid spinning of the sample at the "Magic Angle" (the zero of the second Legendre polynomial, 54.7°) with respect to B_0 . If the rotational rate is fast compared to chemical shift
25 anisotropies and dipolar couplings (in units of Hz), the resolution is dramatically improved – often by two or three orders of magnitude. Even when the spinning is not fast enough to satisfy the above conditions, substantial improvements in resolution are generally obtained from the combination of MAS and multiple-pulse methods. Similar resolution problems are encountered in liquids of inhomogeneous systems, as in tissues and the mixtures of liquids
30 and solids, because of susceptibility variations throughout the material. Here, relatively slow MAS is often effective in improving the spectral resolution of the liquid species by several orders of magnitude.

In USP #4,511,841, Bartuska discloses a modified Beams-type Bernoulli out-flow drive for MAS; and in his later USP #4,940,942, he discloses a method of improving its axial stability and providing variable temperature operation for the sample. In USP # 5,508,615, I disclose a method of suppressing whirl instability in the radial bearings at very high surface speeds in
5 MAS and improving the stability of balanced axial hydrostatic bearings, similar to the one used in USP # 5,202,633. In PCT IB2005/05338, US pat # 7,170,292, we disclose a novel Bernoulli inflow axial bearing that is particularly advantageous for MAS when a ceramic dewar is required between the rotor and the sample coils or when the spinner needs to be hermetically sealed for operation inside an external region evacuated to high vacuum.

10

The progress in increasing sensitivity in NMR has been impressive over the past five decades – three to five orders of magnitude, depending on the application. The most significant, generally applicable contribution to increasing the signal to noise ratio, S/N or SNR, in the past decade has been the introduction of cryoprobes for homogeneous liquid
15 samples, such as that by Marek, USP# 6,677,751 B1, in which the receiver coil, critical tuning elements, and preamps are cryogenically cooled while the sample is kept at some experimentally desired temperature, usually near room temperature (RT). Using high-purity aluminum coils and single-layer capacitors near 25 K with the preamps perhaps at 80 K, the S/N may be increased on one or more channels in a multi-resonant probe for liquid samples
20 by typically a factor of three to four.

Most modern NMR applications are directed at structure determinations of complex macromolecules, where it is often desirable to utilize a probe with high S/N at two or three different frequencies simultaneously, most often $^1\text{H}/^{13}\text{C}/^{15}\text{N}$, and perhaps additionally be able
25 lock the field on the ^2H resonance. High-resolution (HR) NMR probes, in which the sample tube is aligned with the polarizing field, B_0 , with the sample coil and other circuit elements at cryogenic temperatures, are widely used for improved S/N for liquid samples. In these probes, the sample coils are in an evacuated region for heat insulation reasons; but probes for liquids NMR do not include a sample spinner, and their rf sample coil voltages need not
30 be very high. We are aware of no evidence that NMR probes for solid samples have ever utilized rf coils in vacuum.

Using the same coil (or coils) for both transmit and receive has been the preferred approach in NMR spectroscopy probes, both for liquids and solids, for at least three decades. In this
35 case, Hoult's principle of reciprocity, which at least in its popular usage states that the NMR

S/N during reception is, among other things, proportional to the square root of the circuit efficiency for generating a transverse rf magnetic field within the sample during transmit, has seldom been challenged.

5 Reciprocity, as defined above, fails to be valid when the various loss mechanisms (sample, sample coil, capacitors, shields, etc.) are at significantly different temperatures, as the transmit efficiencies are determined by the various resistances in the circuit, but the noise power during receive is proportional to both the resistance and its temperature. Hence, reciprocity fails in cryoprobes, such as that disclosed in USP # 5,508,613, where the sample
10 and perhaps some other minor loss components are much warmer than the sample coil. In USP # 7,151,374, I disclose another case in which reciprocity fails – when the sample coil is not cooled, but other critical circuit components are – that is practical in high field narrow bore magnets.

15 In patent application publication USP # 7,282,919, we disclose the first CryoMAS probe for use in wide-bore magnets, where the RT shim bore is typically 73 mm, that permits substantial improvements in S/N in triple-resonance HR MAS NMR in high field magnets without cooling the sample. This referenced prior art has a number of deficiencies: (1) the foam and fibrous materials required for thermal insulation lead to unacceptable outgassing
20 and rapid degradation of the hi-Q hi-voltage rf components from cryodeposits; (2) the rf circuitry voltages are limited by corona and arcing (in the pressurized helium cold zone) to about 1500 V, which is not sufficient for the rf field strengths needed for many applications in NMR of solids; (3) an exceptionally large cryocooler, requiring ~10 kW of mains power, is required to achieve the temperature needed (~25 K) for the desired high gain in S/N and
25 high stability of the Q; (4) the electret enhanced tribo-electric spin rate detection has very poor sensitivity when used with zirconia ceramic and the instability of the signal makes automatic closed loop control of the spin rate extremely difficult to achieve; (5) very high thermal strain is unavoidable in the ceramic spinner dewar, which makes it difficult to achieve reliability of its vacuum seals; and (6) the large first-stage heat leaks require an
30 inconveniently large first-stage (90 K) cooling loop and a complex defrost system.

This instant disclosure provides effective solutions to the above problems in the prior art and simultaneously reduces overall manufacturing complexity and cost. The inventive design is readily compatible with triple-resonance plus lock, extended-range variable temperature
35 operation, automatic sample exchange, and commonly available closed-cycle cold fingers.

The key to the innovation is the discovery that it is possible to make a ceramic/metallic spinner assembly that simultaneously satisfies the requirements of hermeticity, low total emissivity, rf compatibility, spinning performance, magnetic compatibility, and high filling factor by utilizing metal construction except for the central region near the rf sample coils.

5 Hence, it is possible to maintain high vacuum in the region external to the novel MAS spinner assembly even over a very broad range of bearing and drive gas temperatures.

The instant invention, like the prior art CryoMAS, utilizes multiple rf sample coils to allow more effective minimization of sample losses, as discussed in "Using a cross-coil to reduce
10 RF heating by an order of magnitude in triple-resonance multinuclear MAS at high fields", *J. Magn. Reson.*, 2006, **182**, 239-253, by F. D. Doty, J. Kulkarni, C. Turner, G. Entzminger, and A. Bielecki. This is essential for minimization of sample noise and hence for maximum S/N.

15 The benefits of operating high-voltage components in high vacuum, are well known. While the breakdown voltage decreases by more than two orders of magnitude as the gas pressure is reduced from standard atmospheric pressure to about 1 Torr for gaps of ~6 mm at zero magnetic field, as the pressure is further reduced, the breakdown voltage increases. At zero field, the breakdown at pressures below ~20 mTorr may be an order of magnitude
20 greater than at one atmosphere. The breakdown voltage in low pressure helium at high magnetic fields can be two orders of magnitude lower than for nitrogen at similar pressure and zero magnetic field. While pressure below 50 mTorr may be sufficient for some applications, successful operation of high-voltage rf circuits in a vacuum in high magnetic field where the primary residual gas is helium often requires pressure below 2 mTorr.

25 Achieving this level of vacuum in a complex rf zone that houses an MAS sample spinner (especially one that must operate over a wide range of temperatures) and must be pumped via a flexible evacuation hose at least 5 m long has previously been perceived to be impractical.

30 We have discovered that seals between soft copper alloys of acceptably low magnetism (<5E-5 volumetric SI units) and some ceramics, including zirconia and silicon nitride, made using high-strain, high-strength epoxy between overlapping thin-walled cylinders of minimal clearance can achieve sufficient hermeticity (helium leak rates below 1E-7 std-cc/s) and mechanical robustness over the temperature range of at least 80-400 K, as desired for the
35 NMR sample temperature range. When the metallic cylinder is outside the ceramic cylinder

in the joint, both the epoxy and the ceramic in the lap joint experience primarily compressive stresses at temperatures below the temperature at which the epoxy was cured. Brittle materials are much less likely to fail under compressive stress than under tensile stress. Helium leak rates smaller than $1\text{E-}7$ std-cc/s could further enhance performance and reliability, and leak rates as large as $1\text{E-}4$ std-cc/s could sometimes be acceptable.

The benefits of operating cryogenic components in high vacuum to minimize convective heat loss are also well known, but elimination of convective heat loss is not sufficient for acceptably low heat load. The emissivity of warm ceramics, as required in the central portion of the hermetic MAS spinner assembly, is typically greater than 0.8. This would lead to an unacceptable heat load on the second-stage (~ 25 K) cold finger if the ceramic surface area was not quite small. A novel spinner design allows hermetic sealing between metallic manifold components and the central ceramic components of minimal surface area. The ceramic and plastic spinner assembly and sleeve components in the prior art CryoMAS spinner assembly had external surface area greater than 30 cm^2 , while the novel hermetic spinner design typically has non-metallic external surface area less than 15 cm^2 .

Various structural and ducting components within the vacuum zone may be warm (200-400 K) without leading to excessive thermal background radiation (and cooling costs) if their surfaces have emissivity below 0.05. Moreover, their contribution to circuit noise may be acceptably small if care is taken to minimize rf eddy currents induced in them and if their surfaces have high electrical conductivity, such as gold flash (~ 0.2 microns) over silver plate.

For maximum S/N benefit, it is necessary to utilize ultra-high-Q capacitors that handle high voltages (greater than 2 kV, preferably 4 kV) and tolerate repeated thermal cycling. In addition, for effective conductive cooling of the sample coil, it is necessary to utilize a dielectric of high thermal conductivity. The coaxial sapphire capacitors disclosed in the prior art CryoMAS patent and publications suffer from extremely high E-field concentrations at the ends of the outer copper sleeve, which makes it difficult to exceed 1500 V breakdown. Disc capacitors are found to have much lower E-field concentrations at the edges of the electrodes for similar dielectric thickness and voltage. The standard low-loss ceramic capacitor dielectrics have thermal conductivity in the range of 1.5 to 8 W/m-K at temperatures in the range of 20 to 40 K. We find no evidence to suggest that high-voltage disc capacitors made using a dielectric of high thermal conductivity (such as alumina, beryllia, magnesia, silicon nitride, aluminum nitride, or single-crystal quartz, all of which have

thermal conductivity greater than 15 W/m-K at temperatures between 20 and 40 K) have ever been used in an NMR probe. We also find no evidence that copper-electrode ceramic disc capacitors have ever been used in NMR probes. High-grade alumina (>95%) is a particularly advantageous dielectric, as it has extremely low RF dielectric loss, exceptionally
5 high thermal conductivity in the 20-40 K range, is mechanically robust, is not toxic, and may be copper plated by proven methods.

Cryodeposits (of solid water, nitrogen, oxygen, argon, CO₂, etc.) build-up over time on cold surfaces that are not in nearly perfect vacuum. The cryodeposits severely degrade the high-
10 voltage dielectric properties of low-loss dielectrics, and they greatly increase the emissivity of bright metals. The problem is more severe when the cold zone contains warm surfaces, especially of softer materials, that have not been carefully outgased at elevated temperature. The need for plastics and foamed and fibrous materials in the prior art pressurized CryoMAS exacerbated the rate of buildup of cryodeposits. Sufficient thermal insulation in the instant
15 invention is obtained using radiation shields, cooled by a first-stage cooler to an intermediate temperature, between the warm components and the cold components. With a radiation shield, the external boundaries of the vacuum zone that contains the cold electronics and the hermetically sealed spinner assembly may be at RT. The outgasing and cryodeposits may be minimized if the vacuum zone is made compatible with a vacuum bake-out at an
20 elevated temperature.

Summary of the Invention

An improved CryoMAS probe is disclosed for obtaining a substantial improvement in signal
25 to noise ratio (S/N) in high-resolution (HR) magic-angle-spinning (MAS) NMR of samples near room temperature (RT) in high-field magnets where the magnet's RT shim bore is greater than 60 mm. All critical circuit components, including the sample coils, are located along with the spinner assembly in a region that may be evacuated to high vacuum for thermal insulation and high-voltage operation. The MAS probe is also compatible with triple
30 resonance, auto sample exchange, variable temperature operation, field locking, and commonly available closed-cycle cold fingers.

One major challenge in implementing CryoMAS is solving the problem of gas leakage from the spinner bearing, drive, and exhaust nitrogen into the cold zone, as some spinner
35 components will necessarily be ceramic and some metal. A novel, hermetically sealed

spinner assembly is disclosed which simultaneously satisfies the requirements of hermeticity, low total emissivity, rf compatibility, spinning performance, magnetic compatibility, and high filling factor by utilizing metal construction except for the central region near the rf sample coils. Hence, it is possible to maintain high vacuum in the region external to the novel MAS spinner assembly even over a broad range of bearing and drive gas temperatures. A bundle of optical fibers is provided for tachometry for spin rates up to 60 kHz. The use of alumina disc capacitors allows the noise contributions from the most critical capacitors to be reduced to a minor fraction of the total and simplifies high voltage operation.

10

Brief Description of the Drawings

Figure 1 is a cross-section the CryoMAS spinner assembly in the XZ plane.

15 Figure 2 is a perspective view showing several components of the probe.

Figure 3 is a longitudinal view of the CryoMAS probe layout in the XZ plane.

Detailed Description of the Preferred Embodiment

20

Figure 1 depicts a view in the XZ plane, roughly to scale, of a representative spinner assembly suitable for the improved CryoMAS probe. Warm bearing gas may be supplied through a small metallic tube **11** at just the rear end and ducted internally in a channel **12** between the innermost sleeve, identified as the spinner stator **13**, and the stator housing tube **14** to the bearing orifices **15**, **16** near both ends of the ceramic rotor **17**, to the variable sample temperature (VT) control jets **18**, and to the inflow Bernoulli bearing orifices **19** that form the axial bearing over the conical stator insert **20**, at the lower end of the rotor. The bearing gas temperature may be well below or well above room temperature, heated and sensed according to the prior art. Exhaust from the axial bearing and the lower bearing orifices **16** vents axially and then downward through a metallic bearing exhaust tube **21**.

30

The ceramic rotor **17** containing the warm sample **22** is driven by warm gas from drive nozzles **23** engaging a radial-inflow microturbine **24** attached to the upper end of the rotor **17**. The drive manifold groove **25** in the spinner stator **13** is pressurized with gas via another small metallic tube **26** not visible in this view, as it is off to the side so as to keep the region

35

below the front of the spinner assembly free for the high-power reactive circuit elements needed to double tune the outer sample solenoid **27** for the LF and MF frequencies. The drive gas vents up the curved rotor-loading tube **28**, through which the warm rotor may be pneumatically ejected and a new one dropped into place. The spin-rate is sensed by means of an optical fiber bundle, **29**, placed such that the lower end of the rotor **17**, is in direct view of the bundle and is partially coated with a reflective or different colored material. The bundle **29**, is routed through the bearing exhaust tube **21** and secured to the conical stator insert, **20**. The inner foil high-frequency (HF) cross coil **30**, between the ceramic coil-form **31** and the sample solenoid **27** is also not visible in this view, as it is very thin, typically about 0.05 mm thick, and may not have any features in the XZ plane, according to the prior art. The plurality of small capacitors at each end used to tune the cross coil to the ¹H frequency, according to the prior art in USP 6,130,537, are also not fully visible in this view, as they are not in the XZ plane.

The inflow-Bernoulli axial bearing and other important spinner assembly details, especially related to the rotor tip plug and the Doty bearing, are disclosed in more detail in U.S. patent # 7,170,292. Other types of Bernoulli axial bearings, such as those in USP # 4,446,430 or in USP # 4,940,942, could also be used, though with some disadvantages. It is necessary to achieve stable sample spinning, at least between 2 kHz and 8 kHz, over the sample temperature range of at least 250 K to 350 K. More preferably, spinning rates from 300 Hz to 30 kHz and sample temperatures from 90 K to 400 K are desired while the sample solenoid is kept below 30 K. In most cases, nitrogen would be used for the bearing and drive gases, but in some cases, it may be desirable to use helium to permit sample spinning at lower temperatures, possibly down to 20 K, or at higher speeds. The spinning gas normally would exhaust from the probe, through tubes **21** and **28**, at near atmospheric pressure, but these pressures may be significantly different from atmospheric pressure, possibly from 0.05 MPa to 0.2 MPa, if needed to improve spinning or sample exchange performance.

The ends of the stator housing tube may be joined to thin walled metallic manifold rings **32**, **33** using high-strain, high-strength epoxies to form hermetic seals that result in helium leak rates less than 1E-7 std-atm-cc/sec. Suitable tapers and fillets may be provided in the metal rings and ceramic tube to minimize stress concentrations.

Figure 2 shows a side overview of the upper portion of the cylindrical CryoMAS probe, also referred to herein as the probe-head, for use in a wide-bore high-field NMR magnet, including the spinner assembly as was shown in more detail in **Figure 1**. Note that the magnet's field strength would usually be greater than 7 T and at least greater than 4 T, as improvements in S/N in low-field applications could more easily be obtained by simply increasing the rotor size. The spinner assembly described above is held by a support ring **34** over suitable bearings at the pivot pins **35**, **36** such that minor adjustments may be possible to its orientation with respect to the axis of the magnet bore. The metallic tubes **11**, **21**, **26**, **28** through which the spinning gases flow, may be made of flexible metal tubes, such as bellows, for a short length to permit such minor adjustments to the orientation. A metallic RT-gas barrier plate, **37**, that serves as a structural base for the components of the probe-head is rigidly attached to remainder of the probe structure not shown in the figure.

Figure 3 shows a cross section of the upper portion of the probe in the XZ plane. A low-magnetism vacuum jacket **38** surrounds the cold zone and is sealed using an o-ring at the RT gas-barrier plate **37** to which it is firmly secured. The vacuum jacket **38** also includes a sealed access duct **39** in the top, suitably designed for sufficiently low gas leak, through which the rotor-loading duct **28** may pass and be sealed by means of an o-ring. The wall of the vacuum jacket **38** is plated on the inside with silver, gold, or copper to a thickness of several rf skin depths at the operating temperature and is made predominately of a low magnetism alloy.

The helium-gas-cooled cold finger **40** slides into the cold-finger support tube **41** and is attached to the second-stage cold plate, **42**, typically of copper alloy with silver or gold plate. A heat exchanger, **43**, made of high conductivity copper, referred to herein as the second-stage heat exchanger, is provided at the upper end of the cold finger as a means of effective heat exchange between the cold plate **42** and the cold helium gas stream. With sufficient attention to the cryo-engineering details, the heat leak can be made sufficiently small for compatibility with commonly available small, closed-cycle, gas-cooled, cold fingers that provide 3.5 W cooling at 25 K, for example, or perhaps larger cold fingers providing more cooling power or lower temperatures. A second helium-gas-cooled heat exchanger, **44**, located downstream of the aforementioned second-stage heat exchanger, **43**, recovers additional cooling power from the cold helium gas and is connected to a first-stage cool plate, **45**, which operates a temperature greater than that of the second stage cold plate **42**. As in prior art, several metal and plastic tubes separated by vacuum may be used to confine

and insulate the cold helium gas flowing within the cold finger. The instant invention may also use the space between the cold finger **40** and support tube **41** to evacuate the region surrounding the spinner assembly shown in **Figure 1** into a manifold at the base of the probe, not shown in the figures as it has no novel features, which is pumped to a pressure less than 50 mTorr by conventional vacuum pumping means via a flexible conduit that may be over 5 m long. Alternatively, a separate metal tube may be used to evacuate the aforementioned space surrounding the spinner assembly into the manifold at the base. Thermal radiation shields **46, 47, 48, 49**, made of thin sheet metal, the surface emissivity of which may be generally less than 0.05 but must be less than 0.1, are placed surrounding the cold components and such shields are cooled conductively to temperatures below 150 K via metal strips by the first-stage cold plate **45**. The warm structural components not fully separated from the cold parts by thermal radiation shields such as the metal tubes **11, 20**, must have their surfaces polished to a high degree and plated such that their emissivity is less than 0.2.

The solenoid is conduction cooled to typically 27 K via thermally conductive alumina-dielectric disc capacitors, **50, 51**, from each end to the cold ground plate **42**. The ceramic coil-form, **31**, is supported at the ends by the warm housing tube **14**, from which the coil-form must be substantially thermally isolated to reduce heat transfer. Such isolation may be achieved by (a) making physical contact between the coil-form **31** and housing tube **14** only over a short length at each of the ends and allowing a cylindrical space **52** between the two parts over a major portion of the length of the coil-form; (b) minimizing the area of ceramic parts that have surface emissivity greater than 0.5 to reduce radiative heat exchange; (c) reducing the cross section area available for thermal conduction by including a set of holes **53, 54** at or near the ends of the coil-form; (d) evacuating the cylindrical space **52** between the coil-form and housing tube **14** via the sets of holes **53, 54** to reduce convective heat exchange. Note that the external surface area of the warm ceramic stator tube **14** is typically under 15 cm² and there are no other warm components on the spinner assembly having high emissivity except the very ends of the ceramic coilform **31**. Total non-metallic external surface area of the spinner assembly is under 20 cm².

The high voltage passive reactive elements required for tuning are mounted above the cold plate **42**, as shown in the perspective view of some of the components in **Figure 2**. These include at least one alumina-dielectric disc capacitor **50** providing thermal contact from the cold plate **42** to one lead **55** of the sample solenoid **27**, and normally a second alumina

capacitor is used at the second solenoid lead. Additional cold capacitors and inductors in the cold zone would also be used as needed to achieve the desired tuning, channel isolation, and impedance transformations from the sample coil to the hermetic rf-feed-through elements **56** which lead to the RT tuning zone **57** below the barrier **37**.

5

In some cases it may be desirable to add a ^2H lock channel to triple resonance capability. This may be best accommodated by adding a second cross coil between the inner ^1H cross coil and the outer solenoid **27**, according to the prior art. In this case, the ^1H cross-coil is normally oriented with its B_1 nearly transverse to B_0 and made with optimal surface coverage for high magnetic filling factor and Q, while the ^2H cross-coil, typically a 2-turn saddle coil similar to the prior art shown in USP # 4,641,098, is oriented orthogonally and made with low surface coverage for minimal degradation in the performance of the ^1H cross coil and outer solenoid.

10

15 It is also possible to effectively utilize a single solenoid **27** without an inner cross coil for double-resonance applications at least up to 7 T and possibly at 9.4 T even when the HF channel is for ^1H , using circuits similar to those used for more than three decades in solids NMR.

20 Although this invention has been described herein with reference to specific embodiments, it will be recognized that changes and modifications may be made without departing from the spirit of the present invention. All such modifications and changes are intended to be included within the scope of the following claims.

Relevant Art

1. F. David Doty, "Probe Design and Construction," *Encycl. of NMR*, Vol. 6, Wiley, 1996.
2. F. D. Doty, Y. A. Yang, and G. E. Entzminger, "Magnetism in NMR Probe Design Part II: HR MAS," *Concepts in Magn. Resn.*, Vol 10(4), 239-260, 1998.
3. Ago Samoson, "New Horizons for Magic-Angle Spinning NMR", *Topics in Current Chemistry*, 246:15-31, 2005, http://www.kbfi.ee/Chem_phys/Homes/Pdf/NewHorizonsMAS_2005.pdf.
4. F. D. Doty, J. Kulkarni, C. Turner, G. Entzminger, A. Bielecki, "Using a cross-coil to reduce RF heating by an order of magnitude in triple-resonance multinuclear MAS at high fields", *J. Magn. Reson.*, 2006, **182**, 239-253. http://www.dotynmr.com/PDF/2006_JMR_Doty_MAS_1H_XC_Coils_preprint.pdf
5. F. D. Doty, S. Shevgoor, J. B. Spitzmesser, "Progress on a 4-channel 3 mm CryoMAS Probe with Auto Sample Exchange for High-field Solids NMR", Presented at EuroMAR, York, UK, 2006.
6. H. Kovacs, D. Moskau, M. Spraul, "Cryogenically cooled probes – a leap in NMR technology", *Mag. Reson. Spect.*, 46, 131-255, 2005. http://www.dq.fct.unl.pt/cadeiras/aeii/download/Seminarios/RMN/ProgNMRspectr05_131_CooledProbes.pdf
7. Malcolm Levitt, <http://www.cryomasnmr.soton.ac.uk/>, 2006.

U.S. PATENT DOCUMENTS

4,442,404	4/1984	Bergmann.....	324/309
4,940,942	7/1990	Bartuska and Lewis....	324/321
5,508,613	4/1996	Kotsubo et al.....	324/318
5,585,723	12/1996	Marek et al.....	324/318
5,424,645	6/1995	Doty.....	324/321
5,814,992	9/1998	Busse-Grawitz et al.....	324/318
5,872,452	2/1999	Cory.....	324/321
5,889,456	3/1999	Triebe et al.....	335/300
6,130,537	10/2000	Doty.....	324/321
6,320,384 B1	11/2001	Doty.....	324/321
6,411,092 B1	6/2002	Anderson.....	324/319
6,437,570 B2	8/2002	Marek.....	324/321
6,617,851	9/2003	Bergmann.....	324/318
6,677,751 B1	1/2004	Marek et al.....	324/318
7,151,374 B2	12/2006	Doty.....	324/321
7,170,292 B2	1/2007	Doty et al.....	324/321
7,196,521 B2	3/2007	Doty.....	324/321
7,282,919 B2	10/2007	Doty et al.....	324/321

CLAIMS

We claim:

1. An NMR MAS probe for NMR investigations of a sample inside a rotor near room temperature in a magnet having static field B_0 greater than 4 T, said probe comprising

a hermetically sealed spinner assembly comprising concentric thin-walled ceramic stator tubes that are supplied with gas through hermetically sealed metallic bearing and drive gas lines and exhausted through a first hermetically sealed curved, rotor-loading exhaust tube at the upper end and a second hermetically sealed exhaust tube at the lower end,

a vacuum zone external to said spinner assembly,

a duct suitable for evacuation of said vacuum zone to a pressure less than 50 mTorr by external pumping means,

a thin-walled ceramic coilform surrounding said spinner assembly and substantially thermally isolated therefrom,

a thermally conductive first rf sample coil supported on said ceramic coilform,

a thermally conductive second-stage cold plate inside said vacuum zone,

said vacuum zone further characterized as containing a plurality of additional high voltage rf reactive elements in addition to said sample coil, at least one of said additional reactive elements providing thermal contact between said sample coil and said second-stage cold plate,

a tuning zone near room temperature and separated from said vacuum zone by a gas-sealing barrier,

rf feed-through elements through said gas-sealing barrier,

a cooled radiation shield,

said vacuum zone further characterized as enclosing warm metallic components having emissivity less than 0.2,

first-stage cooling means for cooling said radiation shield to a temperature below 150 K,

second-stage cooling means for cooling said cold plate to a temperature below 40 K.

2. The probe of 1 in which said spinner assembly is further characterized as being capable of achieving stable sample spinning over the range of sample temperatures from 250 K to 450 K.

3. The probe of 1 in which said spinner assembly is further characterized as including drive nozzles near the upper end and an inward-flow Bernoulli bearing near the lower end.
4. The probe of 1 in which the said spinner assembly has total external non-metallic surface area less than 20 sq. cm.
5. The probe of 1 further characterized as including a bundle of optical fibers placed in said spinner assembly for spin rate detection.
6. The probe of 1 in which at least one of said reactive elements is a ceramic disc capacitor capable of handling rf voltages greater than 2 kV in vacuum, said capacitor comprised of metallic electrodes bonded to a dielectric of thermal conductivity greater than 15 W/m-K at 30 K.
7. The probe of 1 further characterized in that said gas lines and said exhaust tubes have emissivity less than 0.05 and magnetic susceptibility less than 5E-5 SI volumetric units.
8. The probe of 1 further characterized as including an evacuated tube for housing an upstream helium/copper heat exchanger for conductive cooling of said cold plate and a downstream helium/copper heat exchanger for conductive cooling of said radiation shield.
9. The probe of 1 in which the external boundary of said vacuum zone is substantially a polished pure metal near room temperature and has emissivity less than 0.05.
10. The probe of 1 in which means are provided for minor adjustments in the orientation angle of the axis of said spinner assembly and such means substantially have emissivity less than 0.05.
11. The probe of 1 in which said ceramic stator tubes are of silicon nitride.
12. The probe of 1 in which said spinner assembly is further characterized as being capable of achieving stable sample spinning over a range of exhaust pressures.
13. An NMR probe for investigations of a solid sample inside a magnet having static field B_0 greater than 4 T, said probe comprising a sample coil and a ceramic disc capacitor capable

of handling rf voltages greater than 3 kV in air at standard temperature and pressure, said capacitor comprised of metallic electrodes bonded to a dielectric comprised of at least 95% alumina.

14. A method of making an NMR measurement on a solid sample near room temperature using a CryoMAS probe comprising the steps of:

inserting a rotor with a sample into a spinner assembly in the CryoMAS probe inside an NMR magnet, wherein said spinner assembly is further characterized as including hermetic ceramic-to-metal seals,

spinning the sample at the magic angle using pressurized gas near room temperature, using a cryocooler to cool some of the coils and capacitors in tuned circuits in the probe to below 40 K,


maintaining a high vacuum in the region of the cooled coils and capacitors,


applying a sequence of rf excitation pulses to the tuned circuits, and


acquiring and processing the NMR RF signals from the tuned circuits following the excitation pulses.

15. The method of 14 further comprising measuring the spinning rate of the rotor by means of an optical fiber placed into the spinner assembly.

16. The method of claim 14 further comprising the step, performed after the acquisition step, of pneumatically ejecting the rotor from the spinner assembly.

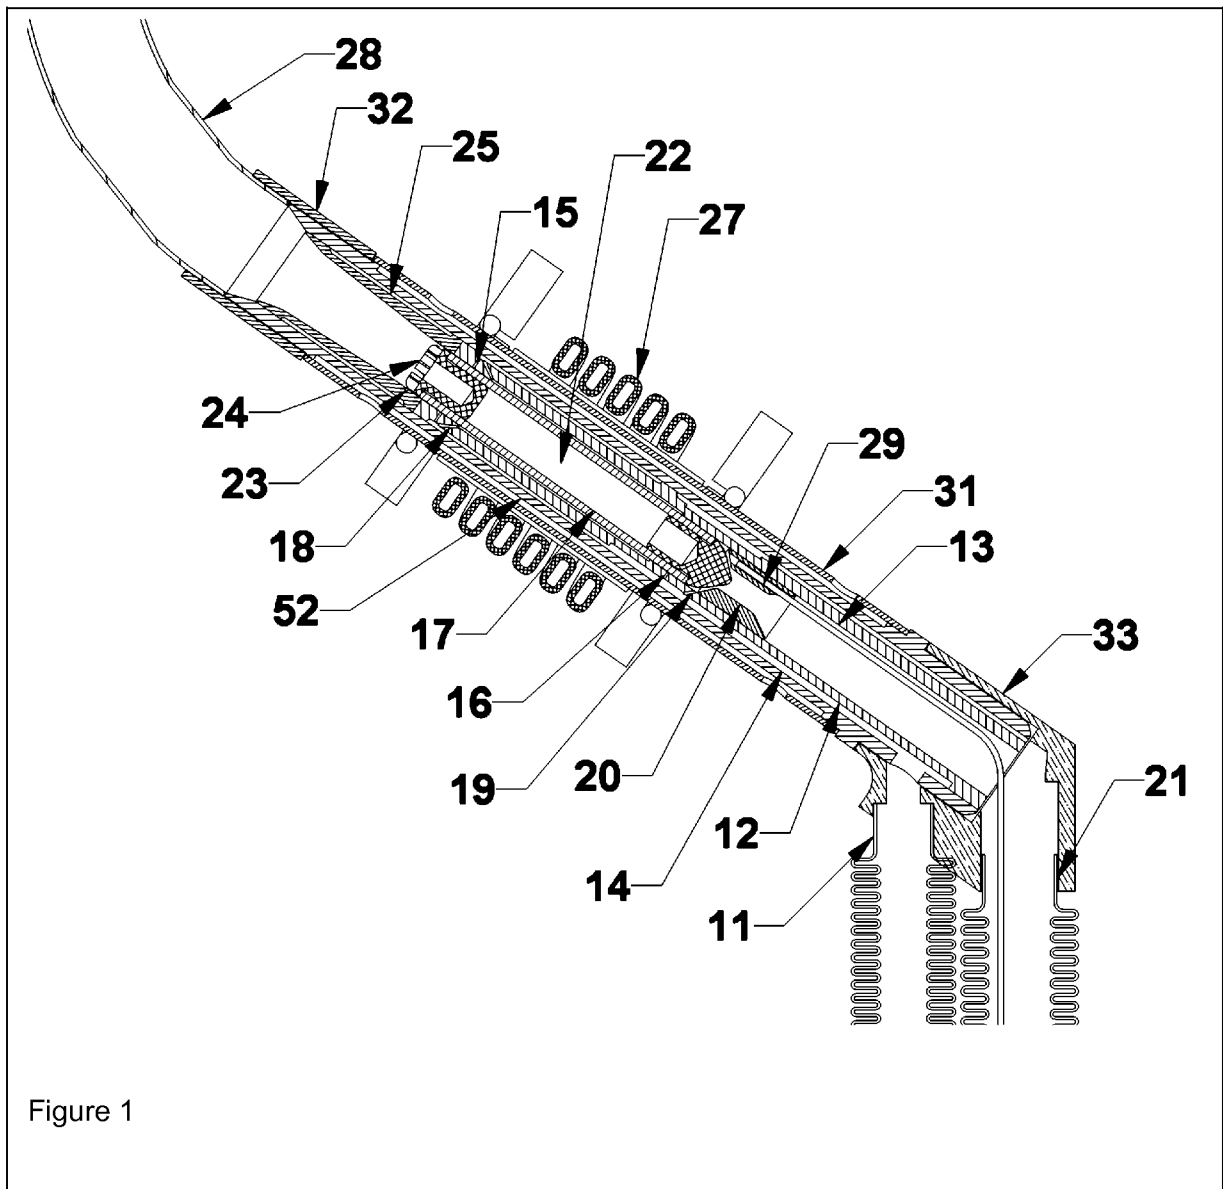

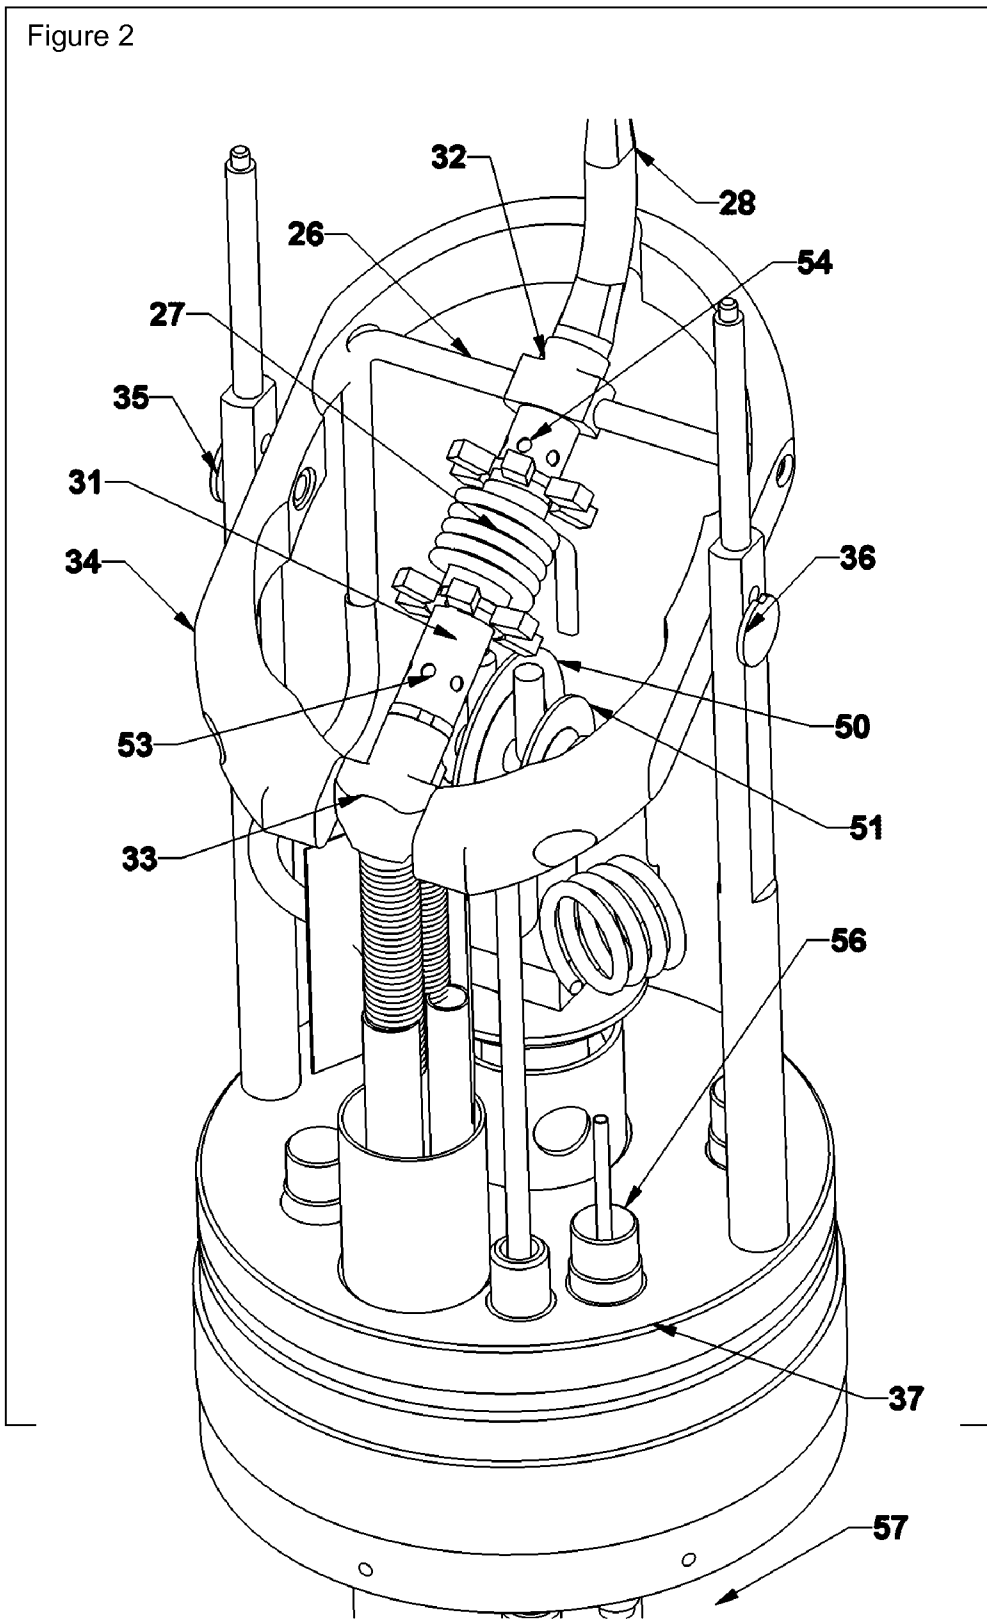

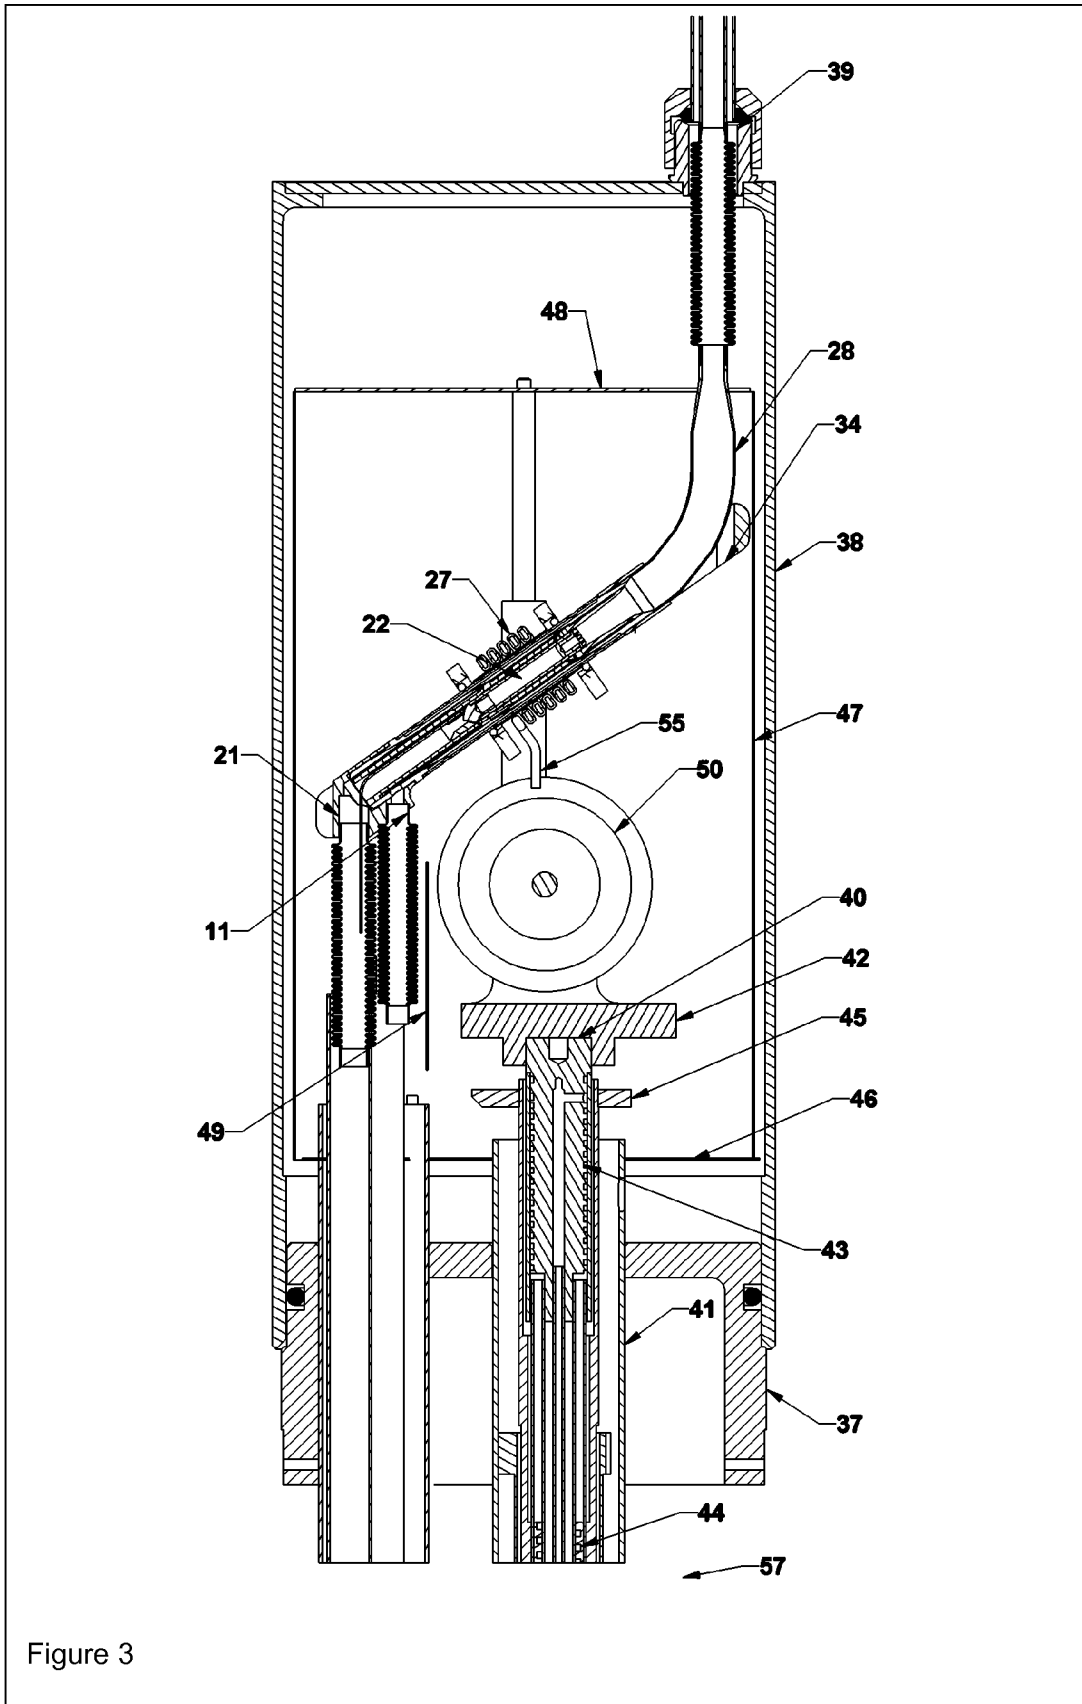

A. CLASSIFICATION OF SUBJECT MATTER**G01R 33/44(2006.01)i, G01V 3/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 8 : G01R, G01V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility models and applications for Utility Models since 1975
Japanese Utility models and applications for Utility Models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKIPASS(KIPO internal) "NMR", "Probe", "Masic Angle Spinning", "Magnetic resonance"

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US20060176056A1(F. David Doty et al) 10 Aug. 2006 See Abstract, Paragraph[0019] ~ Paragraph[0038], Figures 1, 2 , Claims 1, 33	1-12, 14-16
A	US06937020B2 (Eric Jon Munson et al) 30 Aug. 2005 See Abstract, Column 6, Line 11 ~ Column 11, Line 23, Figures 1-3, Claims 1, 6, 9	1-12, 14-16
A	US04940942A (Victor J. Bartuska et al) 10 Jul. 1990 See Abstract, Column 4, Line 66 ~ Column 8, Line 26, Figures 1-4, Claims 1, 23, 34	1-12, 14-16
A	US06686740B2 (Hansjoerg Tschirky et al) 03 Feb. 2004 See Abstract, Column 6, Line 20 ~ Column 7, Line 67, Figures 1, 2, Claim 1	1-12, 14-16
A	US04654592A (Albert P. Zens) 31 Mar. 1987 See Abstract, Column 2, Line 46 ~ Column 3, Line 27, Figures 2, 3	1-12, 14-16

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family


Date of the actual completion of the international search

20 MARCH 2008 (20.03.2008)

Date of mailing of the international search report

20 MARCH 2008 (20.03.2008)

Name and mailing address of the ISA/KR


 Korean Intellectual Property Office
 Government Complex-Daejeon, 139 Seonsa-ro, Seo-
 gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

OH, EUNG GIE

Telephone No. 82-42-481-5929



INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2007/085040**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.: 13
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

The claim is too broad to make meaningful search possible.

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2007/085040

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US20060176056A1	10.08.2006	US07282919B2	16.10.2007
US06937020B2	30.08.2005	US20040222796A1 US2004222796A1 US2004222796AA	11.11.2004 11.11.2004 11.11.2004
US04940942A	10.07.1990	AT148235E AU5439090A1 DE69029800C0 DE69029800T2 DK467963T3 EP00467963B1 EP0467963A1 EP467963A1 EP467963B1 ES2099711T3 JP04504308 JP4504308T2 JP8007168B4 W09013046A1	15.02.1997 16.11.1990 06.03.1997 05.06.1997 10.02.1997 22.01.1997 29.01.1992 29.01.1992 22.01.1997 01.06.1997 30.07.1992 30.07.1992 29.01.1996 01.11.1990
US06686740B2	03.02.2004	DE10111674A1 DE10111674C2 EP01239295A2 EP01239295A3 EP1239295A2 EP1239295A3 EP1239295A2 JP14311118 JP2002311118A2 JP3725086B2 US20020196022A1 US2002196022A1 US2002196022AA	26.09.2002 06.02.2003 11.09.2002 17.03.2004 11.09.2002 17.03.2004 11.09.2002 23.10.2002 23.10.2002 07.12.2005 26.12.2002 26.12.2002 26.12.2002
US04654592A	31.03.1987	DE3670910C0 EP188368A2 EP188368B1 EP188368A3 JP05323007 JP2542496B2 JP5323007A2 JP6040125B4 JP61164146A2 JP61164146	07.06.1990 23.07.1986 02.05.1990 02.09.1987 07.12.1993 09.10.1996 07.12.1993 25.05.1994 24.07.1986 24.07.1986