



US006725127B2

(12) **United States Patent
Stevens**

(10) **Patent No.: US 6,725,127 B2**
(45) **Date of Patent: Apr. 20, 2004**

- (54) **PACKAGE DELIVERY SYSTEM**
- (75) **Inventor: John K Stevens, Toronto (CA)**
- (73) **Assignee: eBox Inc., Toronto (CA)**
- (*) **Notice:** Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

5,774,053 A 6/1998 Porter
 5,815,114 A 9/1998 Speal et al.
 5,979,750 A 11/1999 Kindell
 6,204,763 B1 3/2001 Sone
 6,323,782 B1 11/2001 Stephens et al.

FOREIGN PATENT DOCUMENTS

JP 64-49505 2/1989

Primary Examiner—Gene O. Crawford
(74) *Attorney, Agent, or Firm*—Oppedahl & Larson LLP

(57) **ABSTRACT**

A package storage and delivery system includes electronically controlled lockers disposed at or near customer locations. Each locker is unlocked by a courier, preferably by means of a short-range transceiver or transmitter carried on the courier's person. The customer can unlock the locker and receive the delivered package. Cryptographically signed communications are employed along with nonvolatile usage logs to minimize the risk of loss of a package or fraud by courier or customer. The lockers may be stackable, permitting a delivery courier to add lockers in the event a customer receives too many deliveries to fit into a single locker. Each box has, of course, a physical location, and has associated with it an address code indicative of the physical location, for example by means of a human-readable or compressed representation of the precise latitude and longitude. A package delivered to such a box preferably bears the address code. A merchant can greatly reduce the risk of credit card fraud by requiring the use of such codes for the simple reason that a fraudulent transaction may be traced to a specific physical location.

1 Claim, 2 Drawing Sheets

- (21) **Appl. No.: 10/293,521**
- (22) **Filed: Nov. 12, 2002**
- (65) **Prior Publication Data**
US 2003/0093180 A1 May 15, 2003
- Related U.S. Application Data**
- (63) Continuation of application No. 09/681,654, filed on May 16, 2001, now Pat. No. 6,480,758, and a continuation of application No. PCT/US00/28415, filed on Oct. 14, 2000.
- (60) Provisional application No. 60/206,939, filed on May 25, 2000.
- (51) **Int. Cl.⁷** **G06F 7/00; A47G 29/12**
- (52) **U.S. Cl.** **700/225; 700/226; 340/825.31; 232/20**
- (58) **Field of Search** **700/225, 237, 700/226, 241, 244; 232/1 R, 19, 20, 21; 340/825.31; 342/457**
- (56) **References Cited**
U.S. PATENT DOCUMENTS
4,727,368 A 2/1988 Larson et al.
5,444,444 A 8/1995 Ross
5,625,668 A 4/1997 Loomis et al.

JOE CUSTOMER

E BOX ORD B3K7NP

WINNETKA, IL 60523

45

46

47

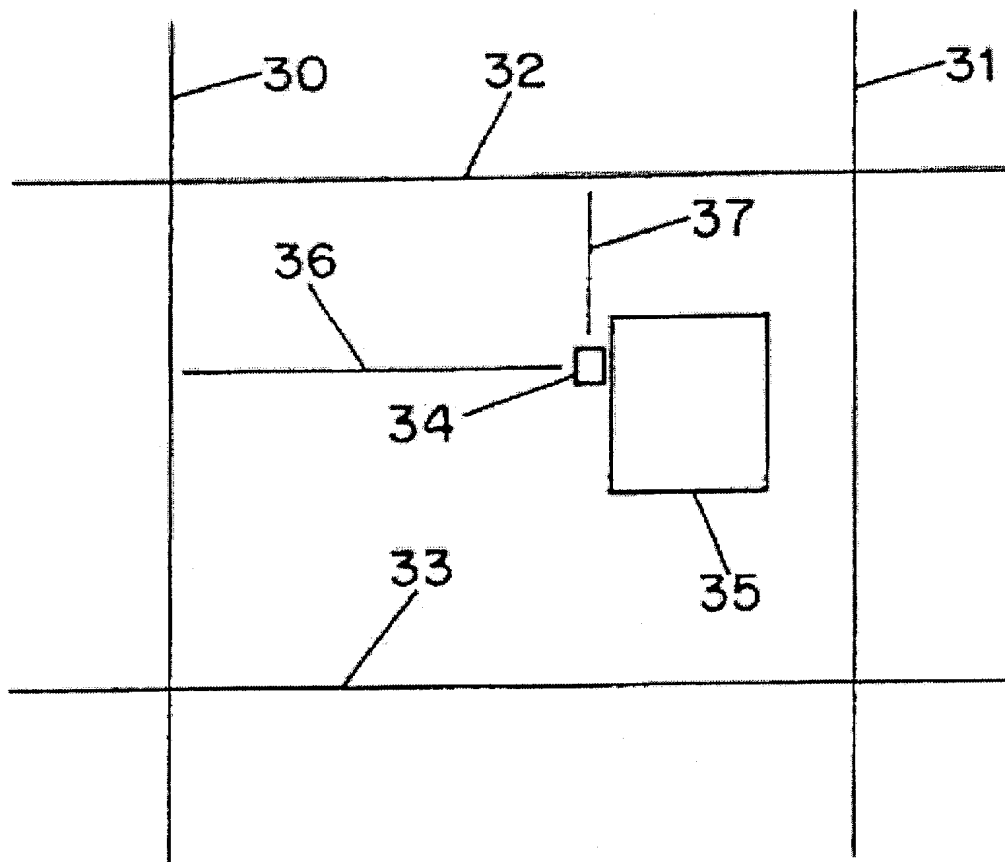


FIG. 1

JOE CUSTOMER

E BOX ORD B3K7NP

WINNETKA, IL 60523

45

46

47

FIG. 2

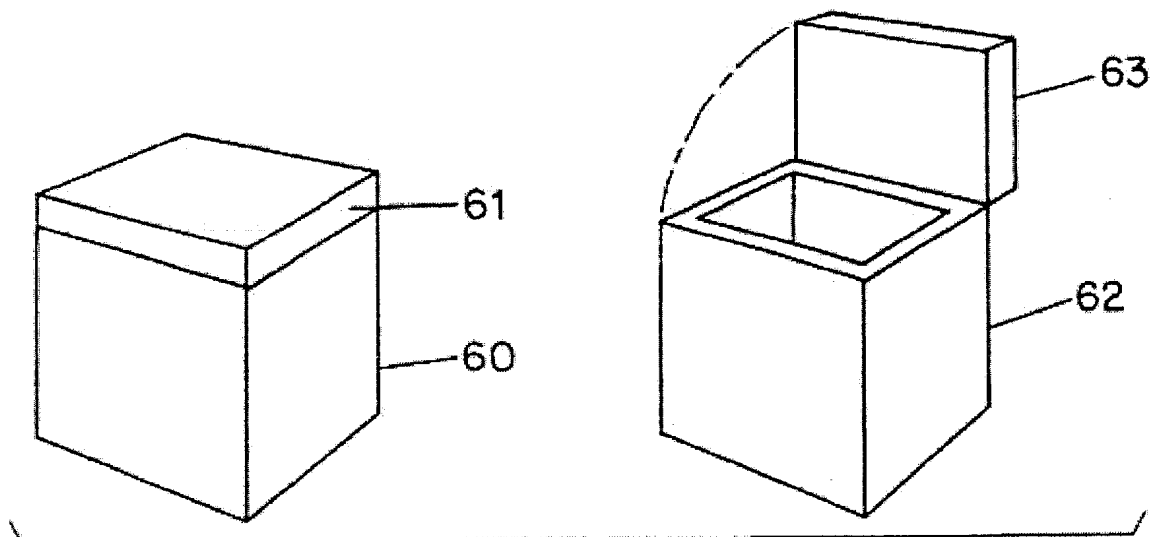


FIG. 3

PACKAGE DELIVERY SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority from and incorporates by reference the following patent applications: U.S. application No. 60/206,939 filed May 25, 2000, and continuation of International Application No. PCT/US00/28415, filed Oct. 14, 2000, designating the United States, published in the English language as WO 01-27740; and continuation of U.S. application Ser. No. 09/681,654 filed May 16, 2001, published Nov. 29, 2001 as U.S. Pat. No. 2001/0045450 A1, now U.S. Pat. No. 6,480,758, issued Nov. 12, 2002.

BACKGROUND

The Internet and other technological changes have brought about sweeping changes in communications and commerce. But just as improved communications media such as optical fiber have been unable to solve the problem of the “last mile” of communications to a particular home, so have improved ways of placing merchandise orders been unable to solve the problem of the “last mile” of merchandise delivery to a particular home. While overnight package delivery services have become commonplace in recent years (for example, Federal Express, United Parcel Service, and Airborne), these services have great difficulty delivering to individual homes. The occupant of the home is often not there (being at work, for example) and thus a carrier may have to visit the home two or more times to effect delivery. The occupant of the home will likely return home from work to find a note on the door indicating that the carrier tried to deliver a package but no one was home.

A related set of problems present themselves when a customer seeks to return mail-order merchandise. The return may be due to a variety of reasons, from incorrect size or color to dissatisfaction with the quality or function of the merchandise. The return can be a nuisance for the customer. Real or perceived difficulty of making returns prompts some would-be mail-order customers to forgo placing the mail order.

Still another problem is mail fraud. Many mail-order merchants face problems with fraudulent orders placed using stolen credit card numbers. The losses attributable to such orders are, of course, passed back to merchants (and through them to customers) through the commissions charged for processing payments for such orders.

A related but distinct concern is simply the delivery cost of the “last mile”. A substantial part of the price charged by a carrier to deliver a package is due to the “last mile”.

There is thus a great need for package storage and delivery systems which overcome the difficulties described above. Such a system would deal with the problem that customers are often not at home. Such a system would make returns easier and would reduce risk of credit card fraud. Such a system would be less expensive than existing systems for last-mile delivery.

Many individuals and companies have devoted time, energy, and ingenuity to these problems. The typical approach is to provide lockers which are geographically nearby to customers and which are intended to remove the need for the customer to be home when the carrier arrives. Prior-art locker systems include those described in U.S. Pat. No. 5,645,215 for “Security mailbox”; U.S. Pat. No. 5,475,378 for “Electronic access control mail box system”; U.S. Pat. No. 5,223,829 for “Electric locker apparatus with automatic locker box designation device”; U.S. Pat. No. 5,074,135 for “System for the use of lockers or the like”; U.S. Pat. No. 4,894,717 for “Delivered article storage con-

trol system”; U.S. Pat. No. 4,048,926 for “Safe”; and U.S. Pat. No. 5,774,053 for “Storage device for the delivery and pickup of goods”.

No prior art approach known to applicants herein succeeds in solving all of the problems discussed above.

SUMMARY OF INVENTION

A package storage and delivery system includes electronically controlled lockers disposed at or near customer locations. Each locker is unlocked by a courier, preferably by means of a short-range transceiver or transmitter carried on the courier’s person. The customer can unlock the locker and receive the delivered package. Cryptographically signed communications are employed along with nonvolatile usage logs to minimize the risk of loss of a package or fraud by courier or customer. The lockers may be stackable, permitting a delivery courier to add lockers in the event a customer receives too many deliveries to fit into a single locker. Each box has, of course, a physical location, and has associated with it an address code indicative of the physical location, for example by means of a human-readable or compressed representation of the precise latitude and longitude. A package delivered to such a box preferably bears the address code. A merchant can greatly reduce the risk of credit card fraud by requiring the use of such codes for the simple reason that a fraudulent transaction may be traced to a specific physical location.

BRIEF DESCRIPTION OF DRAWINGS

The invention will be described with respect to a drawing in several figures, of which:

FIG. 1 is a plan view showing a locker according to the invention and a home;

FIG. 2 shows a package addressed according to the invention; and

FIG. 3 shows a delivery box according to the invention.

Where possible, like reference designations have been used among the figures to show like elements.

DETAILED DESCRIPTION

Delivery of packages may be performed with respect to package lockers that are located according to a coordinate system. FIG. 1 shows a typical locker **34** attached to a home **35**. The home has a location relative to lines of latitude **32**, **33** and lines of longitude **30**, **31** which define a grid. Lines **36**, **37** define the position of the locker within the grid.

In the usual case, the location of the locker **34** is determined at the time of installation, for example using a GPS (global positioning system) receiver. The GPS receiver provides the latitude and longitude, expressed in a suitable notation such as degrees, minutes and seconds or degrees and decimal fractions of a degree. When SA (selective availability) is off, the receiver will provide a spatial resolution of typically ten or twenty feet. If SA is on, it is desirable to use DGPS (differential GPS) to provide a position of comparable accuracy.

A traditional numerical representation of a location by latitude and longitude is rather wasteful of characters. The only characters used are digits, and many of the digits are not used. Unused digits happen because, for example, the number of minutes in a degree is never more than sixty, so the first digit of a “minutes” value is never 7 or 8 or 9. Unused digits also happen because some combinations of digits correspond to geographic locations (e.g. in the Arctic or the middle of the ocean) that are unlikely to be referred to as a package delivery location is a straightforward matter to devise functions which permit expressing geographic locations with far fewer characters than decimally expressed

latitudes and longitudes. Letters can be used along with all ten digits to provide locations expressed in perhaps six or eight characters depending on the desired resolution. Some economy of effort can be accomplished by selecting a reference point such as the airport which might be used to deliver a courier package for an address. Once the airport reference point is selected, it is a straightforward matter to define latitude and longitude relative to that point rather than relative to the usual global origin.

It is thus helpful to consider expressing a locker location by means of an airport code followed by some letters and numbers which communicate the precise position of the locker relative to the reference point of the airport code. Such an expression can be extremely helpful to a courier delivery service. It tells which airport to send the package to, as well as the position relative to that airport.

FIG. 2 shows a package addressed according to the invention. A Zip code **47** may appear on the package but is fundamentally unrelated to the position code just described. The position code may consist of an airport code **45** as well as a character string **46** which conveys the location relative to the airport. Importantly, when a locker is installed, the installer will take a GPS reading, and with appropriate software will convert the latitude and longitude information into the character string **46**.

When a would-be customer places an order for delivery of goods, the customer provides the entire "ebox" code **45, 46** to the merchant. The merchant uses the code **45, 46** to address the package.

The courier company will necessarily perform sorts on packages and will also need to load trucks efficiently. A traditional truck-loading approach is to group the packages by Zip code value. This has the advantage of being simple to do, and has the disadvantage that it may pass up opportunities for trucks to be packed optimally. Two destinations might be very near each other and yet have quite different Zip codes, for example. Sorting packages by Zip code in numerical order will not necessarily place packages near to each other that represent delivery locations that are near to each other.

The position code **45, 46** offers benefits for the trucking and delivery companies. When a truck is being packed, packages that are intended for locations that are suitably nearby to reach other can be easily identified by visual review of the position codes.

In accordance with the invention, what happens next is that a delivery carrier takes the package to the geographic location defined by the location code, and identifies a delivery box **60** (FIG. 3). This box **60** has a lid **61** which locks and unlocks under control of a microprocessor. The carrier transmits a wireless signal to the box that prompts the box to open, and lifts the lid **61** as shown in lifted position **63**. The package may then be placed in the box **62**. The lid is closed, and the customer is notified that there is a package in the box.

Later, the customer causes the box to unlock, preferably by a second wireless signal, and the lid is opened. The package is removed and the lid is closed. Preferably a log is kept of the openings and closings of the box, and the log may be stored in nonvolatile memory in the box for later study in the event of some question as to the delivery of a package.

Importantly, if a merchant ships a package using a position code of the type described here, it is likely that credit card fraud losses could be reduced substantially. If a shipment turns out to have been an order placed by a fraudulent party, the position code permits the authorities to go directly to the place where the package was delivered. This pinpoint locating ability will reduce fraud by making it easier to find the fraudulent party, but also serves as preventive measure

since many would-be fraudulent parties will be deterred by the increased risk of being caught.

On a very practical level a merchant that uses position-coded addresses as described above will have a lower rate of credit card fraud, and credit card merchant banks will likely offer reduced credit card commissions or other incentives to attract the business of such a merchant should also be appreciated that a storage locker such as is described above can be an important part of a delivery system that includes delivery trucks dispatched to deliver during off-peak times. In many areas a suitable off-peak time will be late at night, for example between 10 PM and 7 AM. A typical delivery driver and truck operating during off-peak hours and using lockers such as are described above will be able to perform many more deliveries per hour than a driver and truck operating during peak times (such as during daylight hours) and without such lockers.

In an off-peak approach, the packages may be addressed with location codes as described above. Alternatively, the addresses may be traditional postal service addresses. In either case, some means is required for securely unlocking and locking the lockers. One approach is to receive an order from a customer and to establish a unique identifier in connection with the order. When the carrier reaches the locker, a message is communicated to the locker, preferably by wireless means such as radio or infrared. The locker tests for a predetermined relationship between the message and the identifier, and if the relationship is satisfied the locker unlocks and the lid can be opened. The package is placed in the locker and the lid is closed and locked. The user is then notified that there is a package in the locker.

Those skilled in the art will have no difficulty devising myriad obvious improvements and enhancements to the invention described, all of which are to be considered within the scope of the invention as defined by the claims which follow.

What is claimed is:

1. A method for delivery of parcels with respect to peak and off-peak times, the method comprising:
 - determining a physical location of a premises of a customer within a coordinate system to within a predetermined accuracy;
 - representing the physical location of the premises by means of an address code indicative of the physical location;
 - receiving an order for a parcel from the customer located at the premises, the order comprising the address code;
 - establishing, in connection with the order, a unique identifier;
 - communicating the unique identifier to a locker located at the premises;
 - addressing the parcel with information indicative of the address code;
 - transporting the parcel to the premises, the parcel arriving at the premises during an off-peak time;
 - entering a message to the locker;
 - testing for a predetermined relationship between the message and the unique identifier;
 - opening the locker in the event the predetermined relationship is found;
 - placing the parcel in the locker;
 - annunciating to the customer the placing of the parcel in the locker.